

# Пиранометры DELTA OHM LPPYRA13

## Технические характеристики

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Казахстан (772)734-952-31

Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

Единый адрес для всех регионов: [dmh@nt-rt.ru](mailto:dmh@nt-rt.ru) || [www.deltaohm.nt-rt.ru](http://www.deltaohm.nt-rt.ru)

# Spectrally Flat Class A Pyranometer

## LPPYRA13

### ○ ACCORDING TO THE STANDARD

Follows recommendations of the WMO  
fully compliant with ISO 9060:2018

### ○ GREAT FLEXIBILITY

Wide availability of standard output signals  
for **easy integration** in any installation

### ○ EASY TO SET UP AND QUICK TO INSTALL

**Rugged housing** with low temperature response  
Integrated **levelling device** for perfect positioning

### ○ ACCURATE AND RELIABLE SYSTEM

High reliability - 6 year warranty  
**Individual Calibration Reports** for each instrument

### ○ HIGH IMMUNITY AGAINST INTERFERENCE

**Protected** against overpower and **fully electrically isolated** from any mounting surface



### Main Applications

Environmental studies  
Research  
Meteorology  
PV monitoring

## Research grade high performance pyranometer

The **LPPYRA13** is built around the LPPYRA10, a Spectrally Flat Class A pyranometer. The LPPYRA13 is standard equipped with an adjustable shadow ring for **measuring diffuse radiation only**.

The pyranometers in this series are all based on the thermopile principle, **very precise**. This principle provides a  $\mu\text{V}$  signal without the need of an external power supply. To be able to transfer the signal over a longer distance and to prevent interference, mostly types are equipped with an integrated transmitter. When using a 4-20 mA, 0-10 VDC or RS485 Modbus-RTU output, an external active power supply is necessary. The output of these series is always related to  $\text{W}/\text{m}^2$ .

All our pyranometers are made in a way that the electrical system is totally isolated from the housing, making it possible to mount the pyranometer on any surface, including metal ones, without the need of isolation.

Delta OHM is one of the main pyranometer producers worldwide. We produce a full range of pyranometers according to the **ISO 9060: 2018 - Spectrally Flat Class A, B and C**.


Each of our pyranometers is **calibrated separately** during production; all are supplied standard with a Report of Calibration in accordance with the ISO 9847:1992. Next to this, we are the only pyranometer producer that has invested in a full range of 6 accredited ISO 17025 Calibration Laboratories.

Pyranometers can be used **as stand-alone or in combination with our weather stations**. Delta OHM provides a full range of data loggers with integrated GSM/3G/4G modem to read and transfer measured data to any database or Cloud solution.

## Technical Specifications

Sensor	Thermopile
Typical Sensitivity	6÷11 $\mu\text{V}/\text{Wm}^{-2}$
Impedance	5 $\Omega$ ÷ 50 $\Omega$
Measuring range	0 ÷ 2000 / 4000 $\text{W}/\text{m}^2$
Viewing angle	2 $\pi$ sr
Spectral range (50%)	283 ÷ 2800 nm
Operating temperature/ humidity	-40 ÷ 80 °C 0 ÷ 100 % RH
Output	Depending on the model: - Analog in $\mu\text{V}/\text{Wm}^{-2}$ - Analog 4÷20 mA - Analog 0÷1 V, 0÷5 V or 0÷10 V - Double output: Analog 4÷20 mA + Digital RS485 Modbus-RTU - Digital RS485 Modbus-RTU - Digital SDI-12
Power supply	10÷30 Vdc (4÷20 mA - 0÷1 V - 0÷5 V outputs) 15÷30 Vdc (0÷10 V output) 5÷30 Vdc (RS485 Modbus-RTU) 7÷30 Vdc (SDI-12)
Consumption	< 200 $\mu\text{A}$ for SDI-12 version
Connection	- 4-pole M12 connector for analog output models - 8-pole M12 connector for digital and double output models
Accuracy of levelling device	< 0.1°
Protection Degree	IP 67
MTBF	> 10 years

## Dimensions

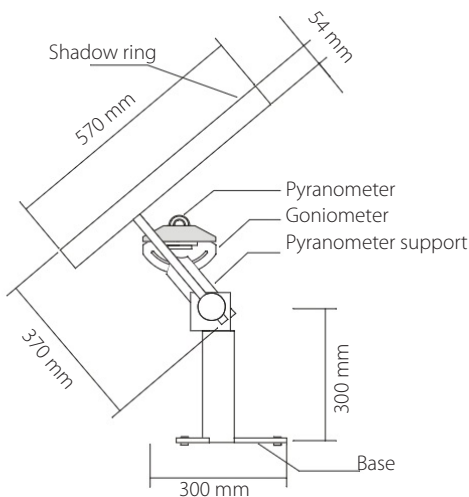

## ISO 9060:2018 Technical Specifications

Classification	Spectrally Flat Class A	
Response time (95%)	< 5 s	
Zero offset	a) response to a 200 $\text{W}/\text{m}^2$ thermal radiation	< $ \pm 7  \text{ W}/\text{m}^2$
	b) response to a 5 K/h change in ambiente temperature	< $ \pm 2  \text{ W}/\text{m}^2$
	c) total zero off-set including the effects a), b) and other sources	< $ \pm 10  \text{ W}/\text{m}^2$
Long-term instability (1 year)	< $ \pm 0.5  \%$	
Non-linearity	< $ \pm 0.2  \%$	
Response according to the cosine law	< $ \pm 10  \text{ W}/\text{m}^2$	
Spectral error	< $ \pm 0.2  \%$	
Temperature response (-10...+40°C)	< 1 %	
Tilt response	< $ \pm 0.2  \%$	

LPPYRA13 is equipped with a **Spectrally Flat Class A** pyranometer (LPPYRA10) in accordance with ISO 9060:2018.



## Ordering Codes

LPPYRA13



Blank = 0...2000  $\text{W}/\text{m}^2$

4 = 0...4000  $\text{W}/\text{m}^2$

Only for AC - AV - ACS models

Blank = Analog in  $\mu\text{V}/\text{Wm}^{-2}$

AC = Analog 4÷20 mA

AV = Analog 0÷1 V, 0÷5 V or 0÷10 (to be defined when ordering)

ACS = Analog 4÷20 mA + digital Modbus-RTU

S = Digital RS485 Modbus-RTU

S12 = Digital SDI-12

All pyranometers are supplied with shade disk, cartridge for silica-gel crystals, 2 spare sachets, levelling device, Calibration Report.

## Accessories

**CPM12AA4.xx** Cable for LPPYRA13 / 13AC / 13AV models. M12 connector on one end, open wires on the other end (2, 5 or 10 m).

**CPM12-8D.xx** Cable for LPPYRA13S / 13S12. M12 connector on one end, open wires on the other end (2, 5 or 10 m).

**CPM12-8DA.xx** Cable for LPPYRA13ACS. M12 connector on one end, open wires on the other end (2, 5 or 10 m).

**CP24** PC connecting cable for the RS485 MODBUS parameters configuration (only for models with RS485 output).

<b>Архангельск</b> (8182)63-90-72	<b>Ижевск</b> (3412)26-03-58	<b>Магнитогорск</b> (3519)55-03-13	<b>Пермь</b> (342)205-81-47	<b>Сургут</b> (3462)77-98-35
<b>Астана</b> (7172)727-132	<b>Иркутск</b> (395)279-98-46	<b>Москва</b> (495)268-04-70	<b>Ростов-на-Дону</b> (863)308-18-15	<b>Тверь</b> (4822)63-31-35
<b>Астрахань</b> (8512)99-46-04	<b>Казань</b> (843)206-01-48	<b>Мурманск</b> (8152)59-64-93	<b>Рязань</b> (4912)46-61-64	<b>Томск</b> (3822)98-41-53
<b>Барнаул</b> (3852)73-04-60	<b>Калининград</b> (4012)72-03-81	<b>Набережные Челны</b> (8552)20-53-41	<b>Самара</b> (846)206-03-16	<b>Тула</b> (4872)74-02-29
<b>Белгород</b> (4722)40-23-64	<b>Калуга</b> (4842)92-23-67	<b>Нижний Новгород</b> (831)429-08-12	<b>Санкт-Петербург</b> (812)309-46-40	<b>Тюмень</b> (3452)66-21-18
<b>Брянск</b> (4832)59-03-52	<b>Кемерово</b> (3842)65-04-62	<b>Новокузнецк</b> (3843)20-46-81	<b>Саратов</b> (845)249-38-78	<b>Ульяновск</b> (8422)24-23-59
<b>Владивосток</b> (423)249-28-31	<b>Киров</b> (8332)68-02-04	<b>Новосибирск</b> (383)227-86-73	<b>Севастополь</b> (8692)22-31-93	<b>Уфа</b> (347)229-48-12
<b>Волгоград</b> (844)278-03-48	<b>Краснодар</b> (861)203-40-90	<b>Омск</b> (3812)21-46-40	<b>Симферополь</b> (3652)67-13-56	<b>Хабаровск</b> (4212)92-98-04
<b>Вологда</b> (8172)26-41-59	<b>Красноярск</b> (391)204-63-61	<b>Орел</b> (4862)44-53-42	<b>Смоленск</b> (4812)29-41-54	<b>Челябинск</b> (351)202-03-61
<b>Воронеж</b> (473)204-51-73	<b>Курск</b> (4712)77-13-04	<b>Оренбург</b> (3532)37-68-04	<b>Сочи</b> (862)225-72-31	<b>Череповец</b> (8202)49-02-64
<b>Екатеринбург</b> (343)384-55-89	<b>Липецк</b> (4742)52-20-81	<b>Пенза</b> (8412)22-31-16	<b>Ставрополь</b> (8652)20-65-13	<b>Ярославль</b> (4852)69-52-93
<b>Иваново</b> (4932)77-34-06	<b>Киргизия</b> (996)312-96-26-47	<b>Казахстан</b> (772)734-952-31	<b>Таджикистан</b> (992)427-82-92-69	

**Единый адрес для всех регионов: [dmh@nt-rt.ru](mailto:dmh@nt-rt.ru) || [www.deltaohm.nt-rt.ru](http://www.deltaohm.nt-rt.ru)**