

Микрофоны измерительные DELTA OHM MC21P

Технические характеристики

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: dmh@nt-rt.ru || www.deltaohm.nt-rt.ru

MC21P MICROPHONE (FREE FIELD)

MC21P MICROPHONE (FREE FIELD)

MC21P is a condenser type microphone, externally polarized (200V) with standard ½" diameter. The frequency response, optimized for free field, is flat from 3.15 Hz to 20 kHz.



Applications

- Acoustic measurements with frontal source
- Class 1 precision sound pressure level measurements
- Optimized free field response
- Laboratory Measurements

Free field microphones are used to measure the existing sound pressure before the microphone is inserted into the acoustic field. The body of the microphone in fact, with its shape and its dimensions, influences the sound field, due to reflection and diffraction phenomena, mainly at high frequencies, where the wavelength of the sound is comparable to the dimensions of the microphone capsule. This phenomenon is physically manifested (disturbance of the acoustic field) with an increase of sound pressure mainly at high frequencies (above 1kHz). The microphones are then compensated to linearize the response in order to obtain a linear free field frequency response curve.

TAB 1

Model	MC21P
Technical Specifications	
Nominal diameter	½"
Precision class	1
Acoustic Response	Free Field
Frequency range	3.15Hz ÷ 20KHz (±2dB)
Polarization (V)	200
Sensitivity (dB re. 1V/Pa)	-27
Nominal sensitivity (mV/Pa)	44.5
Temperature range	-40 ÷ +150 °C
Temperature coefficient	- 0.006 dB/°C
Pressure coefficient	-1.0x10 ⁻⁵ dB/Pa
Capacity (pF)	15
Max level (dB)	146
Intrinsic noise (A weighted)	15
Membrane material	Nickel
Dimensions (mm)	13.2 (diam) x 16.3
Standard (IEC 61094-4)	WS2F


MICROPHONE DRIFTS

Microphone drift coefficient	Value	Maximum Drift [dB]
Ct – temperature	-0.006dB/°C	± 0.3
Cp – static pressure	-0.01dB/kPa	± 0.2
Cu – relative humidity	-	± 0.3

Drift coefficients of acoustic sensitivity, due to temperature and static pressure, generating the sensitivity of microphone-preamplifier-instrument chain to drift (within the limits specified for class 1 according to IEC 61672: 2002). Validity of coefficients: temperature range -10° C to + 50° C; static pressure range 65 kPa to 108 kPa; relative humidity range 25% to 90%

Open Circuit Sensitivity @ 1014.7 mbar & 251.19 Hz
-27.01 dB re 1V/Pascal
44.63 mV/Pascal
+0.99 K₀ (-dB re 50 mV/Pascal)
Expanded Uncertainty @ ~95% confidence level
0.18 dB

Capacitance @ 251.2 Hz
19.4 pF
Lower Limiting Frequency
-3 dB @ 1.25 Hz
Test Conditions:
 Polarization Voltage **200 V**
 Ambient Pressure **1014.7 mbar**
 Temperature **24.1 °C**
 Relative Humidity **31.5 %**

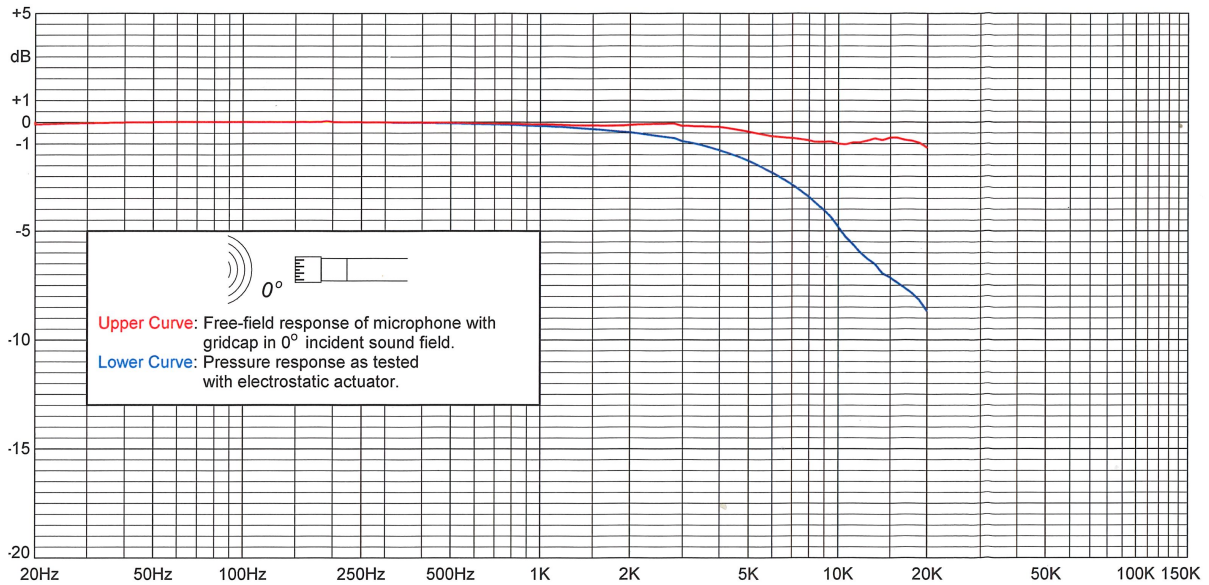

Frequency Response (0 dB @ 251.19 Hz)
Free-field and actuator response with reference to level at 251.19 Hz

Freq (Hz)	Upper (dB)	Lower (dB)	Freq (Hz)	Upper (dB)	Lower (dB)	Freq (Hz)	Upper (dB)	Lower (dB)	Freq (Hz)	Upper (dB)	Lower (dB)	Freq (Hz)	Upper (dB)	Lower (dB)
19.95	-0.09	-0.09	501.19	-0.03	-0.05	1883.65	-0.16	-0.44	4216.97	-0.26	-1.39	9440.61	-0.89	-4.31
25.12	-0.05	-0.05	630.96	-0.05	-0.08	1995.26	-0.13	-0.46	4466.84	-0.32	-1.51	10000.00	-0.98	-4.80
31.62	-0.02	-0.02	794.33	-0.07	-0.12	2113.49	-0.11	-0.50	4731.51	-0.39	-1.64	10592.54	-1.02	-5.26
39.81	0.00	-0.00	1000.00	-0.10	-0.17	2238.72	-0.09	-0.54	5011.87	-0.44	-1.78	11220.19	-0.94	-5.59
50.12	0.01	0.01	1059.25	-0.11	-0.19	2371.37	-0.08	-0.59	5308.84	-0.51	-1.93	11885.02	-0.94	-5.98
63.10	0.01	0.01	1122.02	-0.12	-0.20	2511.89	-0.08	-0.64	5623.41	-0.57	-2.10	12589.25	-0.85	-6.27
79.43	0.01	0.01	1188.50	-0.13	-0.22	2660.73	-0.07	-0.69	5956.62	-0.63	-2.28	13335.21	-0.75	-6.51
100.00	0.01	0.01	1258.93	-0.14	-0.24	2818.38	-0.07	-0.73	6309.57	-0.68	-2.48	14125.38	-0.83	-6.93
125.89	0.01	0.01	1333.52	-0.15	-0.26	2985.38	-0.17	-0.87	6683.44	-0.71	-2.68	14962.36	-0.72	-7.12
158.49	0.01	0.01	1412.54	-0.15	-0.29	3162.28	-0.18	-0.93	7079.46	-0.73	-2.90	15848.93	-0.72	-7.36
199.53	0.01	0.01	1496.24	-0.15	-0.31	3349.65	-0.19	-1.00	7498.94	-0.77	-3.14	16788.04	-0.81	-7.60
251.19	0.00	0.00	1584.89	-0.15	-0.34	3548.13	-0.20	-1.09	7943.28	-0.83	-3.39	17782.80	-0.86	-7.84
316.23	-0.01	-0.01	1678.80	-0.16	-0.37	3758.37	-0.21	-1.18	8413.95	-0.90	-3.69	18836.49	-0.96	-8.17
398.11	-0.02	-0.03	1778.28	-0.17	-0.40	3981.07	-0.22	-1.28	8912.51	-0.91	-3.98	19952.62	-1.16	-8.66

Typical Free Field and Pressure Field frequency responses of MC21P microphone

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

Единый адрес для всех регионов: dmh@nt-rt.ru || www.deltaohm.nt-rt.ru